


TECHPLATE® 108



WEARTECH

AGAINST ABRASION

EXTREME ABRASION & HEAVY IMPACT

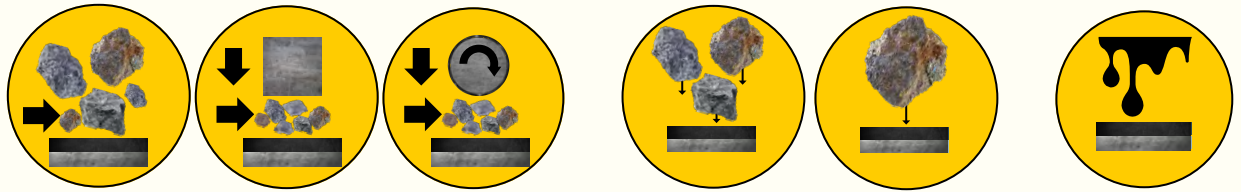

TYPICAL PROPERTIES OF HARD OVERLAY

OVERLAY COMPOSITION		C-Cr-Ni-V-Nb-W		
Nb	Ni	V	W	Cr
1,5 - 2,5%	1,5 - 1,5%	1,5-2,5%	4,5-7,5%	30,0-40,0%
BULK HARDNESS		60±5 HRC		
MICRO-HARDNESS OF HARD PHASES		1200 - 1800 HV		
VOLUME FRACTION OF CARBIDES		~ 60% total carbides.		
SERVICE TEMPERATURE		450°C(845°F)		


- BASE PLATE MATERIAL: ALL TYPES OF STRUCTURAL STEELS, INCLUDING HEAT-RESISTANT, STAINLESS AND AR STEEL.
- INDUSTRIES: MINING, CEMENT, STEEL, POWER GENERATION, GLASS, WOOD, PAPER, RECYCLING.
- APPLICATIONS: CHUTES, PIPES, CONVEYORS, MILLS, SEPARATORS, SCREENS, CONCRETE MIXERS, DUST DUCTS, FANS, EXCAVATOR BUCKETS, TRUCK LINERS AND MANY MORE.



LINEAR BEADS



ZIG-ZAG BEADS



SINE WAVE BEADS

STANDARD SHEET SIZES & THICKNESS OPTIONS

COATED SURFACE AREA

THICKNESS OPTIONS

LARGE 1400 MM X 2900 MM

EXTRA LARGE 1400 MM X 3400 MM

STANDARD: 5+3,6+4,8+4,8+5

8+6,10+5,10+8,12+8,10+10

CUSTOM SIZE AND THICKNESS: ANY SPECIFIC SIZE AND THICKNESS AVAILABLE ON REQUEST